



Single Hydrant Gate Valves with Hand Wheel

Applications

- Used to throttle the flow from a fire hydrant preventing damage to the hydrant
- For use on standpipes and fire pumps where UL listing is required

Features

- O-ring seal
- Other configurations are available, contact Dixon® for additional information

Specification

- Maximum operating pressure: **175 PSI** (water only) at **70°F (21°C)**

Approval

- UL listed



| Inlet Female | Outlet Male | Cast Red Brass Part # |
|-----------------|-----------------|-----------------------|
| 2-1/2" NST (NH) | 2-1/2" NST (NH) | UHGV250F |
| | | UHGV250F-D |

Replacement Part

| Description | Part # |
|-------------|-----------|
| handwheel | UHGV250-W |



Single Hydrant Gate Valves with Speed Handle

Applications

- Used to throttle the flow from a fire hydrant preventing damage to the hydrant
- For use on hydrants, standpipes, and fire pumps

Feature


- Other configurations are available, contact Dixon for additional information

Materials

- Pin lug swivel, non-rising stem, aluminum speed handle
- Rubber seal

Specification

- Maximum operating pressure: **175 PSI** (water only) at **70°F (21°C)**

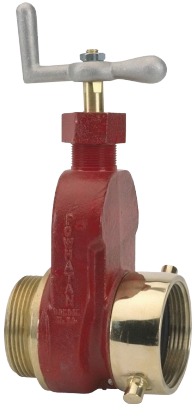

| Inlet Female | Outlet Male | Cast Red Brass Part # |
|-----------------|-----------------|-----------------------|
| 2-1/2" NST (NH) | 2-1/2" NST (NH) | HGV250F |
| | | HGV250F-D |
| | | 2-1/2" NPSH |

Replacement Part

| Description | Aluminum Part # |
|--------------|-----------------|
| speed handle | HGV250-H |



N